


APPLICATION



DIMENSIONS

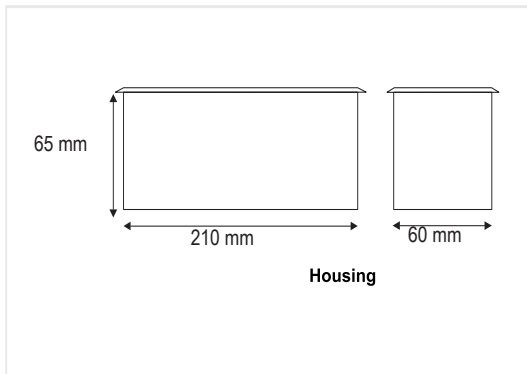

PHYSICAL CHARACTERISTICS

Installation	Stairs Mounted
Depth	65 mm
Length	210 mm
Width	60 mm
IP - Rating	IP 65
Material Standard	Die Cast Aluminium
Finish Custom	Electrostatic Coated
Color	Grey / White

ELECTRICAL / PHOTOMETRIC DATA

Light Source	SMD Led chip
Color Rendering Index	> 80
Color Temp.	3000K
Glare Control	UGR < 20
Diffuser	Glass
Power Factor	> 0.95
Driver	Glitter

SPECIFICATIONS

Code	Power	Total Luminous Flux	System Efficacy
STP-3136	6 W	540 Lm	90 Lm/W

MISCELLANEOUS SPECIFICATIONS

Energy Class	Mains Voltage	Frequency	Safety Class	Operational Temp.	Rated Service Life (H)
A+	220 - 240 V AC	50 / 60 Hz	II	- 20° C / + 50° C	50.000 Hrs