


APPLICATION



DIMENSIONS

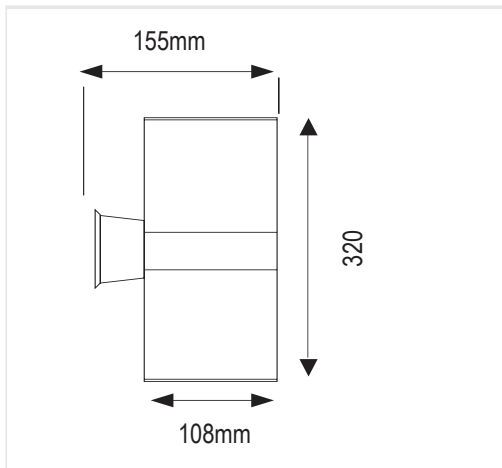

PHYSICAL CHARACTERISTICS

Installation	Wall Mounted
Depth / Height	320mm
Length	n/amm
Width / Diameter	108mm
IP - Rating	IP 65
Material Standard	Die-Cast Aluminum
Finish Custom	Electrostatic Painted
Color	Black

ELECTRICAL / PHOTOMETRIC DATA

Light Source	Cree / SMD-JK-3030
Color Rendering Index	Ra >70
Color Temperature	3000K - 4000K
Power Factor	0.95
Glare Control	UGR < 20
Diffuser	Glass
Driver Brand	Done DL-20W-C300-MPC

SPECIFICATIONS

Code	Power	Total Luminous Flux	System Efficacy
6034-SMD	2x10 W	2x750 Lm	75 Lm/W

MISCELLANEOUS SPECIFICATIONS

Energy Class	Mains Voltage	Frequency	Safety Class	Operational Temp	Rated Service Life
+A	220V – 240V	50/60 Hz	II	-20°C / + 50° C	50.000Hrs