



APPLICATION





PHOTOMETRIC



One Light Direction




Two Light Directions



Four Light Directions

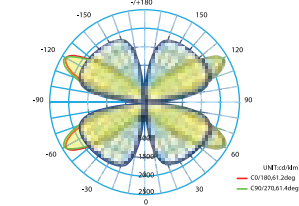

DIMENSIONS

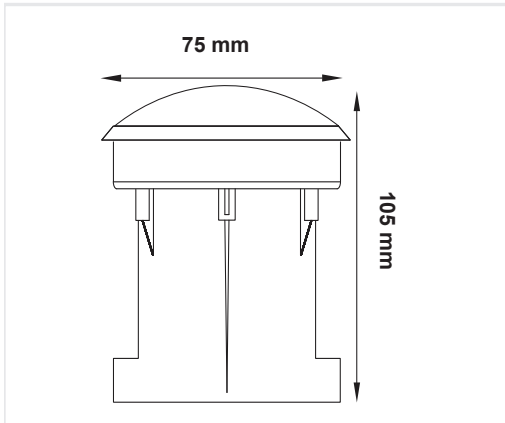

PHYSICAL CHARACTERISTICS

Installation	Floor Recessed
Height	105 mm
Width/Diameter	75 mm
IP-Rating	IP 67
IK-Rating	IK 10
Material Standard	Stainless steel

ELECTRICAL / PHOTOMETRIC DATA

Light Source	Cree Led Chip - SMD
Driver Brand	Glitter Driver
Color Rendering Index	Ra >80
Color Temp.	3000 K
Glare Control	UGR < 20
Diffuser / Reflector	Glass Diffuser

SPECIFICATIONS

Code	Directions	Power	Total Luminous Flux	System Efficacy
7003-D-1	with 1 Light Direction	3 W	270 Lm	90 Lm/w
7003-D-2	with 2 Light Directions			
7003-D-4	with 4 Light Directions			

MISCELLANEOUS SPECIFICATIONS

Energy Class	Mains Voltage	Frequency	Safety Class	Operational Temp.	Rated Service Life (H)
+A	220 - 240 VAC	50 / 60 Hz	II	-20° C / + 50° C	50.000 Hrs