


APPLICATION



DIMENSIONS

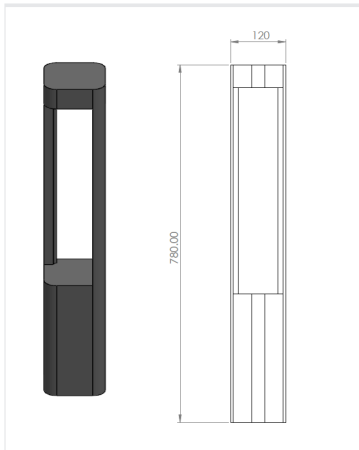

PHYSICAL CHARACTERISTICS

Installation	Bollard Mounted
Height	780mm
Diameter	120 mm
IP-Rating	IP 65
IK-Rating	IK 08
Material Standard	Die Cast Aluminum
Finish Custom	Metallic Grey coated
Color	Available

ELECTRICAL / PHOTOMETRIC DATA

Light Source	Cree-COB (1507)
Color Rendering Index	Ra>80
Color Temperature	3000K
Glare Control	UGR<20
Diffuser	Glass
Power Factor	>0.95
Driver	Done-DL-12W-C240-MCC

SPECIFICATIONS

Code	Power	Total Luminous Flux	System Efficacy
BLD-98	10 W	980 Lm	100 Lm/w

MISCELLANEOUS SPECIFICATIONS

Energy Class	Mains Voltage	Frequency	Safety Class	Operational Temp	Rated Service Life (H)
+A	220V – 240V AC	50 \ 60 Hz	II	-25°C / + 50° C	30.000Hrs