



APPLICATION



PHOTOMETRIC

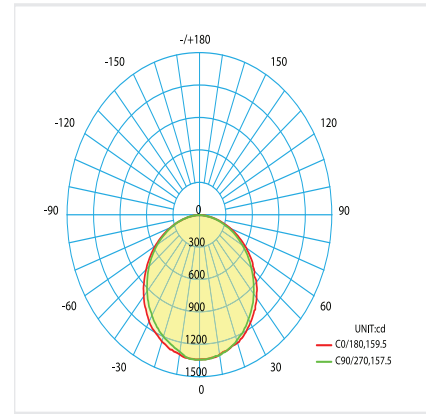

DIMENSIONS

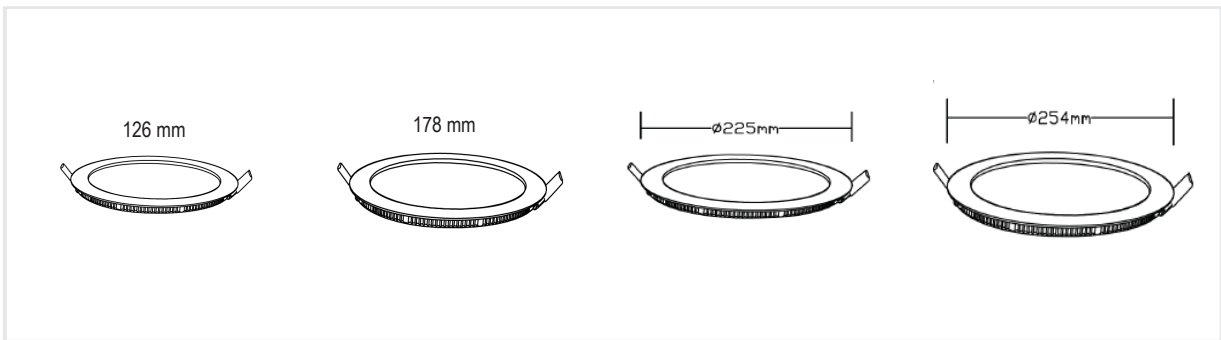

PHYSICAL CHARACTERISTICS

Installation	Recessed Mounted
Dimensions	126x20 mm - 178x20 mm 225x20 mm - 254x20 mm
IP - Rating	IP 20
Material Standard	Die-Cast Aluminum
Finish Custom	Electrostatic Painted
Color	White

ELECTRICAL / PHOTOMETRIC DATA

Light Source	LED chip SMD
Chip Brand	SAMSUNG
Chromaticism Tolerance	5 - Step Mac Adams
Color Rendering Index	Ra>80
Color Temp.	3000k-4000k-6000k
Beam Angle	120°
Glare Control	UGR < 20
Diffuser	Opal
Driver Brand	Lifud

SPECIFICATIONS

Code	Power	Total Luminous Flux	System Efficacy	Diameter	Cut-Out
EGY19-06RC	6 W	540 lm	90 L/W	126 mm	110 mm
EGY19-12RC	12 W	1080 lm		178 mm	160 mm
EGY19-18RC	18 W	1620 lm		225 mm	210 mm
EGY19-24RC	24 W	2160 lm		254 mm	242 mm

MISCELLANEOUS SPECIFICATIONS

Energy Class	Mains Voltage	Frequency	Safety Class	Operational Temp.	Rated Service Life (H)
+A	220 - 240 vAC	50/60Hz	II	-20° C / + 50° C	50.000 Hrs