


APPLICATION



DIMENSIONS

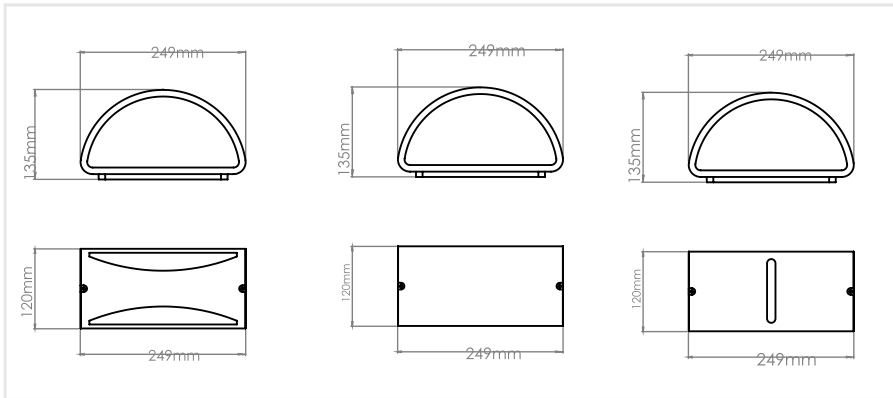

PHYSICAL CHARACTERISTICS

Installation	Surface Mounted
Length/Diameter	249mm
Width	120mm
Height	135mm
Material Standard	Die Cast Aluminum
IP - Rating	IP 54
Finish Custom	Electrostatic Painted
Color	Available

ELECTRICAL / PHOTOMETRIC DATA

Light Source	led lamp
Chromaticism Tolerance	6 - Step Mac Adams
Color Rendering Index	>80
Color Temp.	3000K-4000K-6500K
Beam Angle	120°
Glare Control	UGR < 20
Diffuser	Opal Polycarbonate
Power Factor	>0.9

SPECIFICATIONS

Code	Power	Lamp Luminous Flux	Lamp Efficacy
BLK3301	9W	900 lm	100 lm/W
BLK3303	12W	1055 lm	
BLK3304	15W	1521 lm	

MISCELLANEOUS SPECIFICATIONS

Energy Class	Mains Voltage	Frequency	Safety Class	Operational Temp.	Rated Service Life (H)
A+	220 - 240 V AC	50 / 60 Hz	II	- 10° C / + 45° C	25.000 Hrs