




APPLICATION

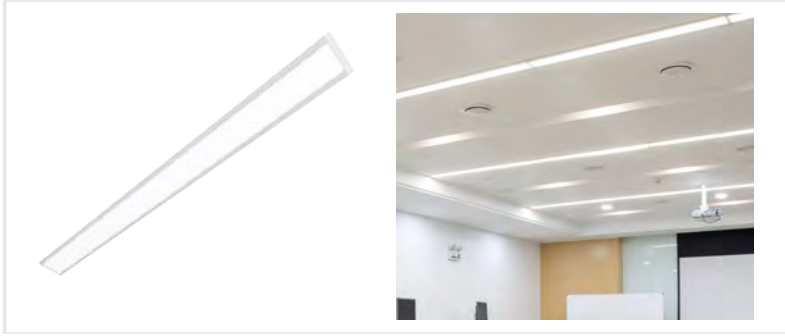

DIMENSIONS

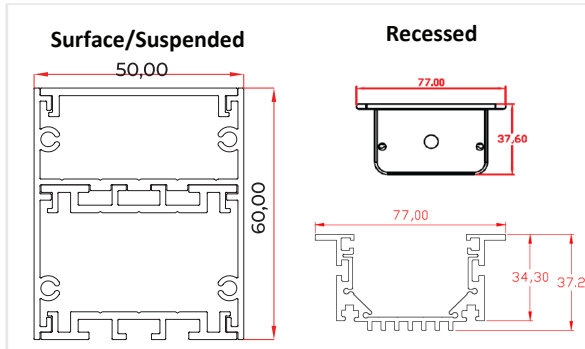

PHOTOMETRIC

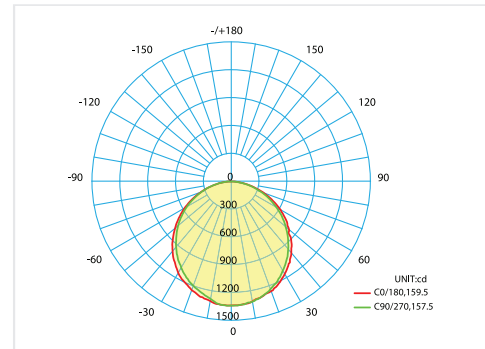

PHYSICAL CHARACTERISTICS

Installation	Recessed / Surfaced / Suspended
Length	56-113-168-225 Cm
IP-Rating	IP 40
Body Material	Die Cast Aluminum Electrostatic
Standard Finish	Painted
Color	White / Black

ELECTRICAL / PHOTOMETRIC DATA

Light Source	LED Chip SMD
Chip Brand	TCI / Lumiled
Color Rendering Index	Ra >80
Color Temp.	3000K - 4000K - 5700K
Glare Control	UGR < 20
Diffuser	Opal PolyCarbonate
Beam Angle	120°
Driver Brand	TCI

SPECIFICATIONS

Code	Power	Total Luminous Flux	System Efficacy	Dimensions
LIN*06013LED-TCI-**	13 w	1365 Lm	105 Lm/w	560 mm
LIN*06017LED-TCI-**	17 w	1785 Lm		560 mm
LIN*06020LED-TCI-**	20 w	2100 Lm		560 mm
LIN*12026LED-TCI-**	26 w	2730 Lm		1130 mm
LIN*12033LED-TCI-**	33 w	3570 Lm		1130 mm
LIN*12040LED-TCI-**	40 w	4200 Lm		1130 mm
LIN*17040LED-TCI-**	40 w	4200 Lm		1680 mm
LIN*17050LED-TCI-**	50 w	5250 Lm		1680 mm
LIN*17060LED-TCI-**	60 w	6300 Lm		1680 mm
LIN*22440LED-TCI-**	40 w	4200 Lm		2250 mm
LIN*22450LED-TCI-**	50 w	5250 Lm		2250 mm
LIN*22460LED-TCI-**	60 w	6300 Lm		2250 mm
LIN*22470LED-TCI-**	70 w	7350 Lm		2250 mm

***>>30>>3000K
 ***>>40>>4000K
 ***>>60>>5700K

LIN*>LINR>>Recessed Luminaire
 LIN*>LIN>>Surface Luminaire
 LIN*>LINS>>Suspend Luminaire

Available with L shape and Square Shape .

DRIVER OPTIONS / SPECIFICATIONS

Driver	Power	Output Current	Power Factor	Temp. °C	Efficiency η	AC operate V
TCI MP50/350 TCI MP80/350	50 W	100-350 mA 100-350 mA	>0.95	-20°C~50°C	>90	198-264VAC

MISCELLANEOUS SPECIFICATIONS

Energy Class	Mains Voltage	Frequency	Safety Class	Operational Temp.	Rated Service Life (H)
A+	220 - 240 V AC	50 / 60 Hz	II	-25° C / + 50° C	50.000 Hrs