



**APPLICATION**

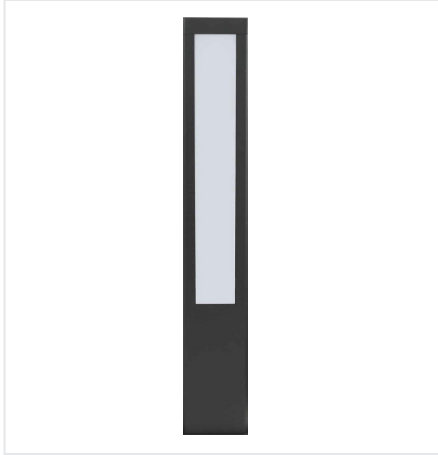

**DIMENSIONS**

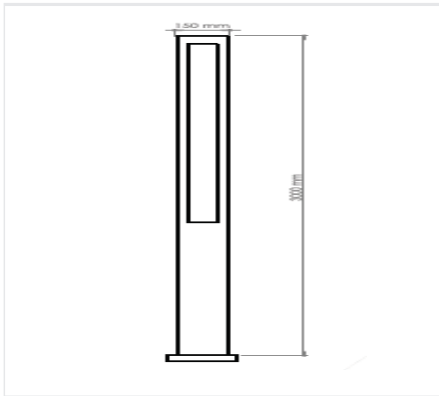

**PHYSICAL CHARACTERISTICS**

Installation	Pole Mounted
Height	3000mm
Length	150mm
IP-Rating	IP 54
Material Standard	Aluminum
Finish Custom	Electrostatic Painted
Color	Grey(default),Black

**ELECTRICAL / PHOTOMETRIC DATA**

Light Source	TCI Led Chip
Color Rendering Index	Ra>80
Color Temperature	3000K-4000K-5700K
Glare Control	UGR<20
Diffuser	Opal PolyCarbonate
Power Factor	>0.95

**SPECIFICATIONS**

Code	Power	Total Luminous Flux	System Efficacy
MK3-40W-**	40 W	3600 Lm	90 Lm/w

Specification
***I>>30>>3000K
***I>>40>>4000K
***I>>60>>5700K

**DRIVER OPTIONS / SPECIFICATIONS**

Driver	Power	Output Current	Power Factor	Temp. °C	Efficiency η	AC operate V
TCI MP50/350	50 W	100-350 mA	>0.95	-20°C~50°C	>90	198-264VAC

**MISCELLANEOUS SPECIFICATIONS**

Energy Class	Mains Voltage	Frequency	Safety Class	Operational Temp	Rated Service Life (H)
+A	220V – 240V AC	50 \ 60 Hz	II	-25°C / + 50° C	50.000Hrs