



APPLICATION



DIMENSIONS

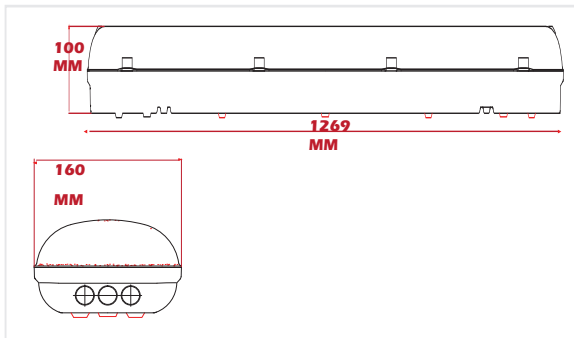

PHOTOMETRIC

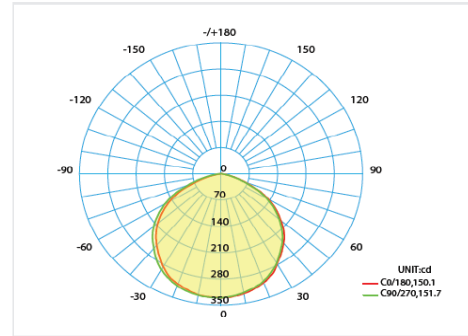

PHYSICAL CHARACTERISTICS

Installation	Surface Mounted
Height	100 mm
Length x Width	1269X160 mm
IP - Rating	IP 67
IK - Rating	IK 10
Material Standard	Poly Carbonate

ELECTRICAL / PHOTOMETRIC DATA

Light Source	Color	Led Lamp
Rendering Index		Ra >80
Color Temperature		4000K / 6500K
Beam Angle		120°
Glare Control		UGR < 20
Reflector		ElectroStatic coated sheet steel
Diffuser		Transparent/Opal Polycarbonate

SPECIFICATIONS

Code	Power	Lamp Luminous Flux	Lamp Efficacy	Diffuser
MARLED	1X18W	1800 Lm		Transparent
MARLED-01	1X18W	1800 Lm		Opal
MARLED2120	2X18W	3600 Lm	100 Lm/W	Transparent
MARLED2120-01	2X18W	3600 Lm		Opal
MARLED3120	3X18W	5400 Lm		Transparent
MARLED3120-01	3X18W	5400 Lm		Opal

MISCELLANEOUS SPECIFICATIONS

Energy Class	Mains Voltage	Frequency	Safety Class	Operational Temp.	Rated Service Life (H)
A+	220-240v AC	50/60Hz	II	-10° C / + 45° C	25.000 Hrs