




APPLICATION

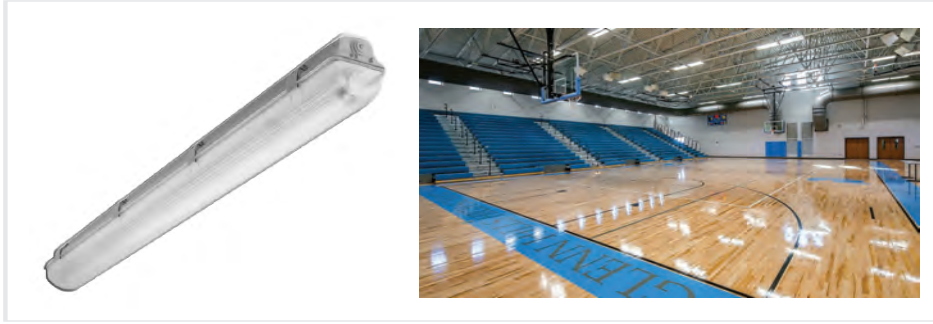

DIMENSIONS

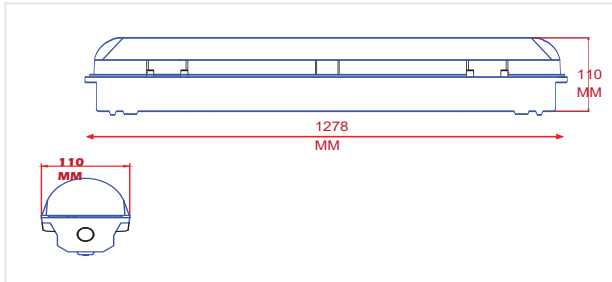

PHOTOMETRIC

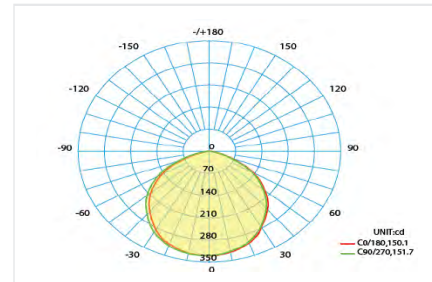

PHYSICAL CHARACTERISTICS

Installation	Surface Mounted
Height	110 mm
Length x Width	1278X110
IP - Rating	IP 66
IK - Rating	IK 10
Fixture Material	Polycarbonate

ELECTRICAL / PHOTOMETRIC DATA

Light Source	TCI LM560/24E44 / LumiLed 2835R
LED chip efficacy	Up to 164 lm/W
Chromaticism Tolerance	3 - Step Mac Adams
Color Rendering index	Ra >80
Color Temperature	3000K / 4000K / 5700K
Beam Angle	120°
Glare Control	UGR < 20
Reflector	ElectroStatic coated sheet steel
Diffuser	Transparent/Opal Polycarbonate

SPECIFICATIONS

Code	Power	Chip Luminous Flux	Total Luminous Flux	System Efficacy	Diffuser
OCE112025LED-TCI-**	25 W	4100 lm	3000 lm	120 Lm/W	Transparent
OCE112036LED-TCI-**	36 W	5900 lm	4300 lm		
OCE112040LED-TCI-**	40 W	6280 lm	4800 lm		
OCE112025LED-TCI-**-01	25 W	4100 lm	2650 lm	105 Lm/W	Opal PolyCarbonate
OCE112036LED-TCI-**-01	36 W	5900 lm	3780 lm		
OCE112040LED-TCI-**-01	40 W	6560 lm	4200 lm		
OCE112025LED-LM-**	25 W	4100 lm	3000 lm	120 Lm/W	Transparent
OCE112036LED-LM-**	36 W	5900 lm	4300 lm		
OCE112040LED-LM-**	40 W	6280 lm	4800 lm		
OCE112025LED-LM-**-01	25 W	4100 lm	2650 lm	105 Lm/W	Opal PolyCarbonate
OCE112036LED-LM-**-01	36 W	5900 lm	3780 lm		
OCE112040LED-LM-**-01	40 W	6560 lm	4200 lm		

DRIVER OPTIONS / SPECIFICATIONS

Driver	Power	Output Current	Power Factor	Temp. °C	Efficiency η	AC operate V
TCI MP50/350	50 W	100-350 mA	>0.95	-20°C~50°C	>90	198-264VAC

Specification
**>>>30>>3000K
**>>>40>>4000K
**>>>60>>5700K
"-EMER>>With Battery

MISCELLANEOUS SPECIFICATIONS

Energy Class	Mains Voltage	Frequency	Safety Class	Operational Temp.	Rated Service Life (H)
A+	220 - 240 V AC	50 / 60 Hz	II	-20° C / + 50° C	50.000 Hrs