




APPLICATION

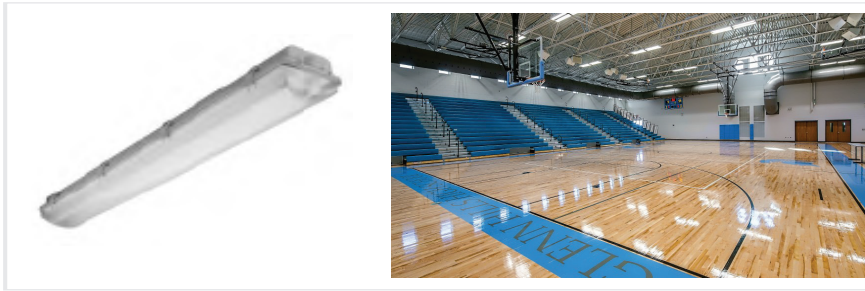

DIMENSIONS

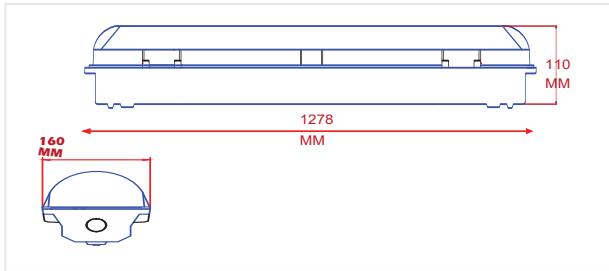

PHOTOMETRIC

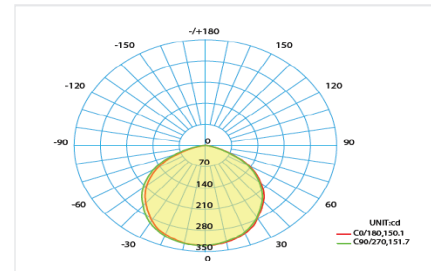

PHYSICAL CHARACTERISTICS

Installation	Surface Mounted
Height	110 mm
Length x Width	1278X160
IP - Rating	IP 66
IK - Rating	IK 10
Fixture Material	Polycarbonate

ELECTRICAL / PHOTOMETRIC DATA

Light Source	TCI LM560/24E44 - LumiLed 2835R
LED chip efficacy	Up to 164 lm/W
Chromaticism Tolerance	3 - Step Mac Adams
Color Rendering index	Ra >80
Color Temperature	3000K / 4000K / 5700K
Beam Angle	120°
Glare Control	UGR < 20
Reflector	ElectroStatic coated sheet steel
Diffuser	Transparent/Opal Polycarbonate

SPECIFICATIONS

Code	Power	Chip Luminous Flux	Total Luminous Flux	System Efficacy	Diffuser
OCE212040LED-TCI-**	40 W	6560 lm	4800 lm	120 Lm/W	Transparent
OCE212045LED-TCI-**	45 W	7380 lm	5400 lm		
OCE212050LED-TCI-**	50 W	8200 lm	6000 lm		
OCE212040LED-TCI-**-01	40 W	6560 lm	4200 lm	105 Lm/W	Opal PolyCarbonate
OCE212045LED-TCI-**-01	45 W	7380 lm	4725 lm		
OCE212050LED-TCI-**-01	50 W	8200 lm	5250 lm		
OCE212040LED-LM-**	40 W	6560 lm	4800 lm	120 Lm/W	Transparent
OCE212045LED-LM-**	45 W	7380 lm	5400 lm		
OCE212050LED-LM-**	50 W	8200 lm	6000 lm		
OCE212040LED-LM-**-01	40 W	6560 lm	4200 lm	105 Lm/W	Opal PolyCarbonate
OCE212045LED-LM-**-01	45 W	7380 lm	4725 lm		
OCE212050LED-LM-**-01	50 W	8200 lm	5250 lm		

DRIVER OPTIONS / SPECIFICATIONS

Driver	Power	Output Current	Power Factor	Temp. °C	Efficiency η	AC operate V
TCI MP50/350	50 W	100-350 mA	>0.95	-20°C~50°C	>90	198-264VAC

Specification
***>>30>>3000K
***>>40>>4000K
***>>60>>5700K
**-EMER>>With Battery

MISCELLANEOUS SPECIFICATIONS

Energy Class	Mains Voltage	Frequency	Safety Class	Operational Temp.	Rated Service Life (H)
A+	220 - 240 V AC	50 / 60 Hz	II	-20° C / + 50° C	50.000 Hrs