



APPLICATION



DIMENSIONS

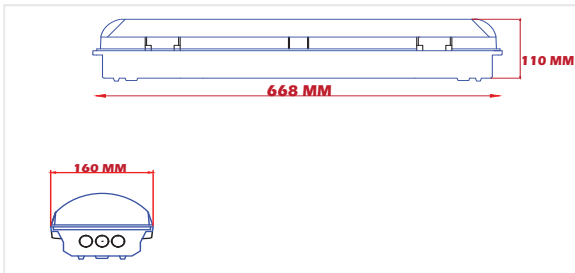

PHOTOMETRIC

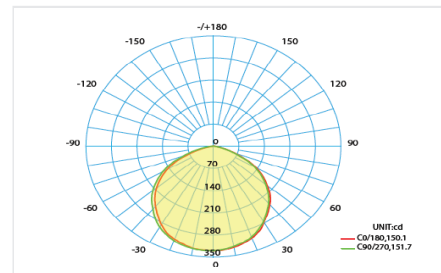

PHYSICAL CHARACTERISTICS

Installation	Surface Mounted
Depth / Height	110 mm
Length x Width	668X160
IP - Rating	IP 65
IK - Rating	IK 10
Material Standard	Poly Carbonate

ELECTRICAL / PHOTOMETRIC DATA

Light Source	TCI LM560/24E44 - LumiLed 2835R
LED chip efficacy	Up to 164 lm/W
Chromaticity Tolerance	3 - Step Mac Adams
Color Rendering index	Ra >80
Color Temperature	3000K / 4000K / 5700K
Beam Angle	120°
Glare Control	UGR < 20
Reflector	ElectroStatic coated sheet steel
Diffuser	Transparent/Opal Polycarbonate

SPECIFICATIONS

Code	Power	Chip Luminous Flux	Total Luminous Flux	System Efficacy	Diffuser	Specification
OCE26025LED-TCI-**-01	25 W	4100 lm	3000 lm 2625 lm	120 lm/W 105 lm/W	Transparent Opal	***">30>>3000K ***">40>>4000K ***">60>>5700K "-EMER>>With Battery
OCE26036LED-TCI-**-01	36 W	5900 lm	4300 lm 3780 lm	120 lm/W 105 lm/W	Transparent Opal	
OCE26040LED-TCI-**-01	40 W	6560 lm	4800 lm 4200 lm	120 lm/W 105 lm/W	Transparent Opal	
OCE26025LED-LM-**-01	25 W	4100 lm	3000 lm 2625 lm	120 lm/W 105 lm/W	Transparent Opal	
OCE26036LED-LM-**-01	36 W	5900 lm	4300 lm 3780 lm	120 lm/W 105 lm/W	Transparent Opal	
OCE26040LED-LM-**-01	40 W	6560 lm	4800 lm 4200 lm	120 lm/W 105 lm/W	Transparent Opal	

DRIVER OPTIONS / SPECIFICATIONS

Driver	Power	Output Current	Power Factor	Temp. °C	Efficiency η	AC operate V
TCI MP50/350	50 W	100-350 mA	>0.95	-20°C~50°C	>90	198-264VAC

MISCELLANEOUS SPECIFICATIONS

Energy Class	Mains Voltage	Frequency	Safety Class	Operational Temp.	Rated Service Life(H)
A+	220 - 240 V AC	50 / 60 Hz	II	-20° C / + 50° C	50.000 Hrs