



**APPLICATION**



**DIMENSIONS**

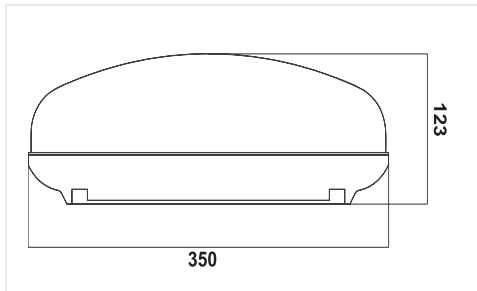

**PHOTOMETRIC**

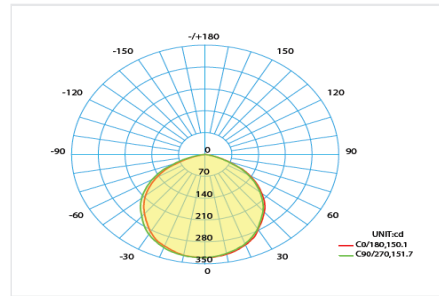

**PHYSICAL CHARACTERISTICS**

Installation	Surface Mounted
Depth / Height	123 mm
Length	350 mm
Width / Diameter	350 mm
IP - Rating	IP 65
Fixture Material	Polycarbonate

**ELECTRICAL / PHOTOMETRIC DATA**

Light Source	LED lamps
Color Rendering index	Ra >80
Color Temperature	3000K - 4000K - 6500K
Beam Angle	120°
Glare Control	UGR < 20
Diffuser	Opal PolyCarbonate / Transparent

**SPECIFICATIONS**

Code	Power	Lamp Luminous Flux	Lamp Efficacy
PLF0903100-1	9 W	900 Lm	100 Lm/W
	12 W	1151 Lm	
	15 W	1500 Lm	
PLF0903100-2	2 * 9 W	1800 Lm	100 Lm/W
	2 * 12 W	2300 Lm	
	2 * 15 W	3000 Lm	
PLF0903100-3	3 * 9 W	2700 Lm	100 Lm/W
	3 * 12 W	3450 Lm	
	3 * 15 W	6500 Lm	

**Note:**  
 "-01" << for Opal PolyCarbonate Diffuser.  
 "1T" << for fixture with battery.

**MISCELLANEOUS SPECIFICATIONS**

Energy Class	Mains Voltage	Frequency	Safety Class	Operational Temp.	Rated Service Life (H)
A+	220-240v AC	50/60Hz	II	-10° C / + 45° C	25.000 Hrs